




HP Professional Satin Photo Paper

The HP large format printing system—the complete solution

HP Latex printers, Original HP inks and printheads, and Original HP printing materials are designed to work together as a system to provide reliable, consistent results with every print.

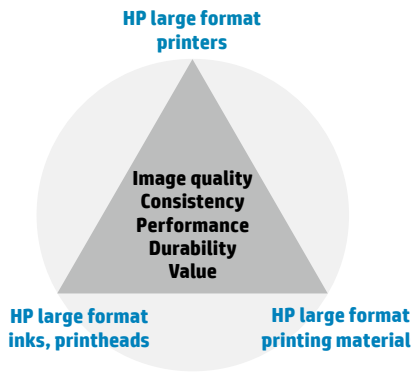

Experience outstanding, heavyweight, resin-coated photo paper for photographic printing

Enjoy high-performance photo printing

Now you can print high-end photography, posters, and retail graphics for either custom or high-volume projects with your HP Latex printer on this versatile resin-coated photo paper.

Move quickly and efficiently through production

There's no need to wait; print and deliver to provide quick turnarounds for your customers. This heavyweight photo paper (275 g/m²) also provides increased stability for handling high-volume production.

Achieve spot-on, dynamic color

The bright-white finish provides a high dynamic range and a wide color gamut for color-critical, eye-catching reproductions on a satin finish.

Target customers	Applications	Benefits
Point-of-purchase providers	Photo enlargements	Prints come out completely dry, enabling production printing
Trade show and exhibit companies	Art and décor reproductions	Heavy, thick construction for easy handling
Photo and art reproduction houses	Point-of-purchase displays	Wide color gamut and bright-white surface
	Trade show and event displays	FSC®-certified paper ¹

¹ BMG trademark license code FSC®-C115319, see [fsc.org](https://www.fsc.org).
HP trademark license code FSC®-C017543, see [fsc.org](https://www.fsc.org).
Not all FSC®-certified products are available in all regions.

Technical specifications

HP Professional Satin Photo Paper

For the latest ICC profiles/paper presets and a variety of resources to help you get the most out of your printer and HP large format printing materials, please visit globalBMG.com/hp.

Weight	275 g/m ² per ISO 536 Test Method			
Thickness	248 microns/9.8 mil per ISO 534 Test Method			
Opacity	Greater than 96% per TAPPI T-425 Test Method			
Brightness	96% per TAPPI T-452 Test Method			
Whiteness	130 per ISO 11475 Test Method			
Finish	Satin			
Operating temperature	15 to 35° C / 59 to 95° F			
Operating humidity	30 to 80% RH			
Dry time	Instant dry			
Lamination	Yes, cold			
Shelf life	1 year, unopened in original packaging			
Storage temperature	0 to 40° C / 32 to 104° F			
Storage humidity	5 to 95% RH			
Country of origin	Product of Germany			Region
Ordering information	Product numbers	Roll sizes	UPC codes	
	E4J46A	914 mm x 30,5 m (36 in x 100 ft)	848412014501	Worldwide
	E4J47A	1067 mm x 30,5 m (42 in x 100 ft)	848412014518	Worldwide
	E4J48A	1372 mm x 30,5 m (54 in x 100 ft)	848412014525	Worldwide
	E4J49A	1524 mm x 30,5 m (60 in x 100 ft)	848412014532	Worldwide
Warranty	HP large format printing materials are free from defects in materials and workmanship. For warranty statement, please see globalBMG.com/hp/mediawarranties .			

Note: Not all FSC®-certified products are available in all regions.

For detailed information on the HP large format printing materials portfolio and to order, see globalBMG.com/hp

